

OTR-1U-C



Features

- Holds up to 4 single slot OTR Tx or Rx in 1U
- 90 to 240 VAC power supply
- Hot-swappable OTR cards
- Up to twelve 3G-SDI channels in 1U (with OTR-304)
- Quiet fan for enhanced cooling of installed cards

The OTR-1U-C is a cost effective, 4 slot, 1U chassis for mounting any single slot OTR transmitter or receiver in a equipment rack. Clean up the installation by racking up to 4 single slot OTR transmitters or receivers or mix and match in the same chassis. The unit comes standard with a single 90-240 VAC power supply and the OTR insert cards are hot-swappable. The OTR-1U-C also has a quiet fan for proper air flow over the OTR insert cards.



OTR-1U-C

1U CHASSIS FOR OTR SERIES

Models


Model	Description
OTR-1U-C	19" Chassis, 1U with 4 slots for single slot OTR cards, Single 90-240 VAC power supply

Specifications

Mechanical Specification	
Enclosure type	1U Rack mount
Dimensions (W x H x D)	19" x 1.75" x 10"
Weight	10 lbs
Power Specification	
Power Supply	90-240VAC
Power Consumption	12 Watts (max fully loaded)
Environmental Specification	
Operating Temperature	0 to +50 C
Relative Humidity	0 to 90%, non-condensing
Storage Temperature	-20 to +85 C

OTR INSERT
CARD SLOTS

CHASSIS POWER LED

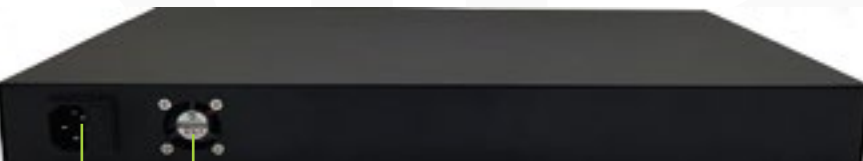

FAN

AC POWER SUPPLY